

# 1.3/3 Megapixel Day&Night Pro Box Network Camera





MS-C2151-PA/MS-C3356-PA/MS-C3556-PA



## KEY FEATURES

- High-performance Ambarella series DSP
- H.264/MJPEG video compression
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- E-PTZ, 3D-DNR, Privacy Masking and Motion Detection
- I/O interface, FTP upload, Email Alert for Alarm processing
- RS485 interface for PTZ Camera Control
- SD/SDHC/SDXC card storage is available
- Built-in 802.3af Compliant PoE
- Support ONVIF Profile S

## DIMENSIONS (mm)

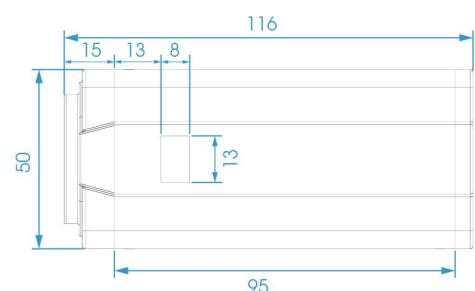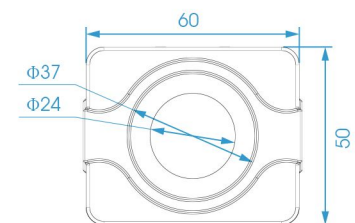

## SUPPORTED BROWSERS



Firefox

IE

Chrome

Safari



	Model	MS-C2151-PA (1.3MP)	MS-C3356-PA (3.0MP)	MS-C3556-PA (3.0MP)
Camera	Image Sensor	Progressive Scan CMOS		
	Min. Illumination	Color: 0.01Lux@F1.2 B/W: 0.005Lux	Color: 0.07Lux@F1.2 B/W: 0.025Lux	
	WDR	WDR	WDR Pro	WDR
	Shutter time	1/100000s~1/5s		
	Day &Night	ICR Filter Auto Switch		
	Mount	C/CS		
	Video	Max Image Resolution	1280×960	2048×1536
Frame Rate		30fps(1280×960), 30fps(1280×720), 30fps(704×576)	20fps(2048×1536), 30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)	
Video Compression		H.264/ MJPEG		
Video Bit Rate		16Kbps~16Mbps (CBR/VBR adjustable)		
Image Setting		Brightness/Contrast/Saturation/Sharpness		
Network		Ethernet	1 RJ45 10M/100M Ethernet port	
	Network Storage	NAS(Support NFS, SMB/CIFS)		
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN		
Audio	Audio Compression	G .711/AAC		
	Audio I/O	1/1		
System	Alarm I/O	1/1		
	Storage	Support SD/SDHC/SDXC Local Storage, up to 64G		
	Advanced Function	Motion Detection, Privacy Masking, Backlight Compensation, 3D-DNR, ROI		
	SIP/VoIP Support	Yes, Voice & Video-over-IP		
	Event Trigger	Motion Detection, Network Disconnection, Audio Trigger etc.		
	Event Action	FTP upload/ SMTP upload/ SD card record/ External output/ SIP Phone		
	System Compatibility	ONVIF Profile S		
General	Working Temperature	-30℃~60℃		
	Working Humidity	0~90%(non-condensing)		
	Power Supply	PoE/ DC12V±10%		
	Power Consumption	2.5W MAX	3W MAX	
	Weight	375g		
	Dimensions	116mm×60mm×50mm		
	Warranty	2years		

Note: MS-C2151-PA, P refers to POE, A refers to H.264

V6.07

