

# 1.3/2/3 Megapixel Remote Focus&Zoom Pro Dome Network Camera





MS-C2172-F(I)PNA/MS-C3272-F(I)PNA/MS-C3372-F(I)PNA/  
MS-C3376-F(I)PNA/MS-C3576-F(I)PNA



## KEY FEATURES

- Integrated IR Corrected Varifocal Lens(Auto Focus)
- High-Performance Ambarella series DSP
- H.264/MJPEG video compress
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- E-PTZ, 3D-DNR, Privacy Masking and Motion Detection
- Micro SD/SDHC/SDXC card local storage support
- Weather-proof IP66 and vandal-proof IK10-rated metal housing
- Built-in efficient IR LEDs, IR distance up to 20m
- Built-in 802.3af Compliant PoE
- Built-in Microphone
- Support ONVIF Profile S

## DIMENSIONS (mm)

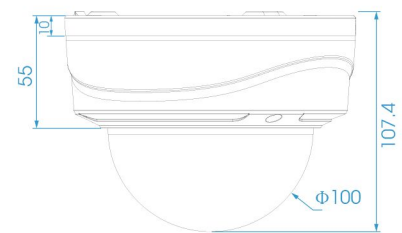

## SUPPORTED BROWSERS



Firefox

IE

Chrome

Safari



	Model	MS-C2172-F(I)PNA (1.3MP)	MS-3272-F(I)PNA (2.0MP)	MS-C3372-F(I)PNA (2.0MP)	MS-C3376-F(I)PNA (3.0MP)	MS-C3576-F(I)PNA (3.0MP)
Camera	Image Sensor	Progressive Scan CMOS	SONY Exmor CMOS	Progressive Scan CMOS		
	Min. Illumination	Color: 0.01Lux@F1.2 B/W: 0Lux with IR on		Color: 0.07Lux@F1.2 B/W: 0Lux with IR		
	WDR	WDR		WDR Pro		WDR
	Lens	Motorized 3.0-10.5mm/7-22mm @F1.4 P-Iris(optional)				
	Mount	Φ14				
	Field of View	H88°- H28.2° (3.0-10.5mm)	H99.8°- H31.8° (3.0-10.5mm)	H76.2°- H25° (3.0-10.5mm)	H81.4°- H26.6° (3.0-10.5mm)	
	Shutter Time	1/100000s~1/5s				
	IR Distance	Up to 20m				
	Day&Night	ICR Filter Auto Switch				
	Video	Max Image Resolution	1280×960	1920×1080		2048×1536
Frame Rate		30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)	30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)		20fps(2048×1536), 30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)	
Video Compression		H.264/ MJPEG				
Video Bit Rate		16Kbps~16Mbps (CBR/VBR adjustable)				
Image Setting		Brightness/Contrast /Saturation/Sharpness				
Network		Ethernet	1 RJ45 10M/100M Ethernet port			
	Network Storage	NAS(Support NFS, SMB/CIFS)				
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN				
Audio	Audio Streaming	Built-in Microphone				
	Audio Compression	G.711/AAC				
	Audio I/O	1/1 (optional)				
System	Alarm I/O	1/1 (optional)				
	Storage	Support Micro SD/SDHC/SDXC Local Storage, up to 64G				
	Advanced Function	Motion Detection, Privacy Masking, Backlight compensation, 3D-DNR,ROI				
	SIP/VoIP Support	Yes, Voice & Video-over-IP				
	Event Trigger	Motion Detection, Network Disconnection etc.				
	Event Action	FTP upload/ SMTP upload/ SD card record/ SIP Phone				
	System Compatibility	ONVIF Profile S				
General	Working Temperature	-30℃~60℃				
	Working Humidity	0~90%(non-condensing)/ 0~100%(condensing)				
	Power Supply	PoE/ DC12V±10%(optional)				
	Power Consumption	5W MAX		5.5W MAX		
		7W MAX(with IR on)		7.5W MAX (with IR on)		
	Weather Proof	Up to IP66 rating for weather-resistant performance				
	Housing	Vandal-proof IK10-rated metal housing				
	Weight	1100g				
	Dimensions	Φ143mm×107.4mm				
Warranty	2years					

Note: MS-C2172-F(I)PNA, F refers to Motorized Lens, I refers to Iris, P refers to POE, N refers to New model, A refers to H.264

V6.07

