

1.3/2/3 Megapixel Vandal-proof Mini Dome Network Camera





MS-C2173-PNA/MS-C3373-PNA/MS-C3573-PNA/MS-C3377-PNA/
MS-C3577-PNA



KEY FEATURES

- High-performance Ambarella series DSP
- H.264/MJPEG video compression
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- E-PTZ, 3D-DNR, Privacy Masking and Motion Detection
- Micro SD/SDHC/SDXC card local storage support
- Weather-proof IP67 and vandal-proof IK09-rated metal housing
- Built-in efficient IR LEDs, IR distance up to 15m
- Built-in 802.3af Compliant PoE
- Built-in Microphone
- Support ONVIF Profile S

DIMENSIONS (mm)

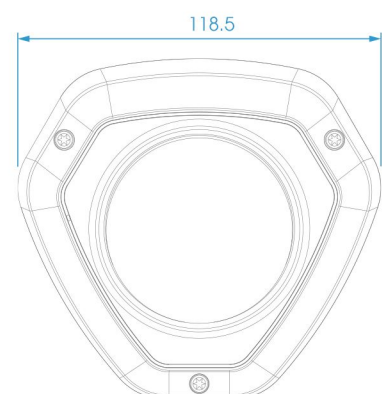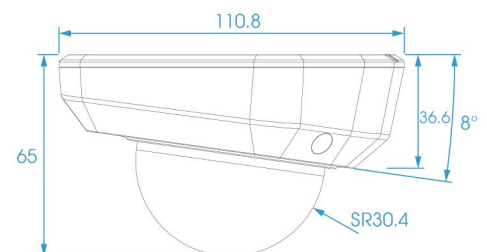

SUPPORTED BROWSERS



Firefox

IE

Chrome

Safari



	Model	MS-C2173-PNA (1.3MP)	MS-C3373-PNA (2.0MP)	MS-C3573-PNA (2.0MP)	MS-C3377-PNA (3.0MP)	MS-C3577-PNA (3.0MP)
Camera	Image Sensor	Progressive Scan CMOS				
	Min. Illumination	Color: 0.01Lux@F1.2 B/W: 0Lux with IR on	Color: 0.07Lux@F1.2 B/W: 0Lux with IR on			
	WDR	WDR	WDR Pro	WDR	WDR Pro	WDR
	Lens	3.6mm @F1.6				
	Mount	M12				
	Field of View	H76.8°(3.6mm)	H67.2°(3.6mm)	H81.6°(3.6mm)	H72°(3.6mm)	
	Shutter Time	1/100000s~1/5s				
	IR Distance	Up to 15m				
	Day&Night	ICR Filter Auto Switch				
Video	Max Image Resolution	1280×960	1920×1080		2048 ×1536	
	Frame Rate	30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)	30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)		20fps(2048×1536), 30fps(1920×1080), 30fps(1600×1200), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)	
	Video Compression	H.264/ MJPEG				
	Video Bit Rate	16Kbps~16Mbps (CBR/VBR adjustable)				
	Image Setting	Brightness/Contrast/Saturation/Sharpness				
Network	Ethernet	1 RJ45 10M/100M Ethernet port				
	Network Storage	NAS(Support NFS, SMB/CIFS)				
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN				
Audio	Audio Streaming	Built-in Microphone				
	Audio Compression	G.711/AAC				
System	Storage	Support Micro SD/SDHC/SDXC Local Storage, up to 64G				
	Advanced Function	Motion Detection, Privacy Masking, Backlight Compensation, 3D-DNR, ROI				
	SIP/VoIP Support	Yes, Voice & Video-over-IP				
	Event Trigger	Motion Detection, Network Disconnection etc.				
	Event Action	FTP upload/ SMTP upload/ SD card record/ SIP Phone				
	System Compatibility	ONVIF Profile S				
General	Working Temperature	-30℃~60℃				
	Working Humidity	0~90%(non-condensing)				
	Power Supply	PoE				
	Power Consumption	3.5W MAX	4W MAX			
		5.5W MAX (With IR on)	6W MAX (with IR on)			
	Weather Proof	Up to IP67 rating for weather-resistant performance				
	Housing	Vandal-proof IK09-rated metal housing				
	Weight	500g				
	Dimensions	110.8mmX118.5mmX65mm				
Warranty	2years					

Note: MS-C2173-PNA, P refers to POE, N refers to New model, A refers to H.264

V6.07

