


# 4K H.265 Pro NVR 5000 Series

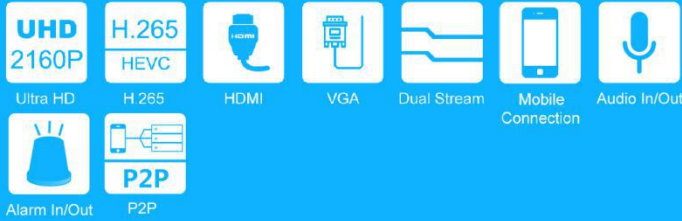

MS-N5016-UT/MS-N5032-UH


DATASHEET

## KEY FEATURES

- ▶ **Powerful Decoding Capacity** (Maximum supporting 8\*1080P or 16\*720P for MS-N5016-UT and 16\*1080P or 32\*720P for MS-N5032-UH.)
- ▶ **HDMI & VGA** (Providing both HDMI and VGA ports for users to choose according to their monitor types.)
- ▶ **2\*3.5" HDD** (2 SATA of 3.5" HDD, providing 10TB capacity for each HDD, up to 20TB total hard disk storage.)

### H.265+H.264

Smartly figure out and switch between H.264 and H.265 automatically. It will extend the days to save recording file with H.265 than with other compressions.

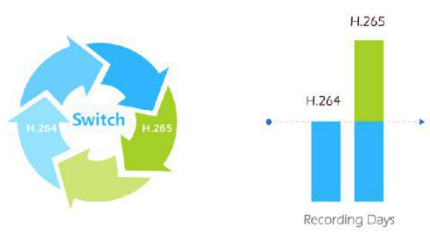

### 4K Video Viewing Experience

Milesight 4K H.265 Pro NVR 5000 Series supports up to 4K definition (3840\*2160, effectively four times that of Full HD ) live viewing, playback and recording, providing users with ultra-high-definition video viewing experience.



### Powerful Decoding Capacity

Maximum supporting 8\*1080P or 16\*720P for MS-N5016-UT and 16\*1080P or 32\*720P for MS-N5032-UH.



### Remote Access

Milesight 4K H.265 Pro NVR 5000 Series can be easily accessed and managed remotely via Milesight CMS and mobile APP.






Model		MS-N5016-UT	MS-N5032-UH
Video/Audio Input	Network Video Input	16-CH	32-CH
	Bandwidth	Incoming 160Mbps Outgoing 160Mbps	320Mbps 256Mbps
Video/Audio Output	HDMI Output	1-CH, Resolution: 3840x2160/60Hz (only for MS-N5032-UH), 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output	
	VGA Output	1-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
	Dual Stream	Support	
	Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF
Synchronous Playback	2*(30fps @8MP), 2*(30fps @6MP), 3*(20fps @5MP), 4*(20fps @4MP), 5*(30fps @3MP), 8*(30fps @1080P), 16*(30fps @720P)	4*(30fps @8MP), 5*(30fps @6MP), 6*(20fps @5MP), 8*(20fps @4MP), 10*(30fps@3MP), 16*(30fps@1080P), 32*(30fps@720P)	
Video/Audio Compression	Video Compression	H.265(HEVC)/H.264	
	Audio Compression	G.711/AAC	
	Sample Rate	8KHz/16KHz	
	Synchronous Recording	16*5MP	32*5MP
Storage	SATA	2*SATA HDD(3.5")	
	Capacity	Up to 10TB capacity for each HDD	
Recording Management	Recording	Manual Recording, Timing Recording, Motion Detection Recording, Alarm Recording, Motion Detection or Alarm Recording, Motion Detection and Alarm Recording	Manual Recording, Timing Recording, Motion Detection Recording
	Snapshot	Manual Snapshot	
	Playback	Video Playback, Image Playback	
Backup	Backup	Video Backup, Image Backup	
Network	Protocol	IPv4, IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, NTP, SNTP, SMTP, UPnP	
External Interface	Network Interface	1*RJ45 100M/1000M	
	USB Interface	1*USB 3.0; 2*USB 2.0	
	Audio Input/Output	— /1*RCA	1*RCA/1*RCA
	Alarm Input/Output	4-CH/1-CH	—
General	Keyboard Control	Myleight Keyboard (MS-K02)	
	Power Supply	DC 12V 50Hz~60Hz	
	Consumption	≤10W(Without HDD)	≤15W(Without HDD)
	Working Conditions	Temperature: -10℃~+55℃ Humidity: 10%~90%	
	Dimensions	1.0U Standard Chassis 440mm(W)×251mm(D)×44.4mm(H)	
	Weight	2.6Kg	
	Warranty	3/5 Years	

# 4K H.265 Pro NVR 5000 Series




## Interfaces

### MS-N5016-UT

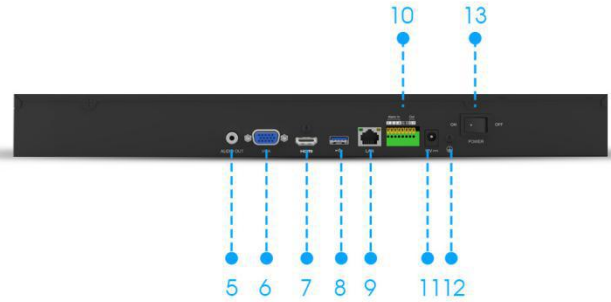


- 1. Run Indicator    2. HDD Indicator    3. Power Indicator    4. USB    5. Audio Out    6. VGA    7. HDMI    8. USB
- 9. Ethernet Port    10. Alarm In/Out    11. Power    12. GND    13. Power Button

### MS-N5032-UH

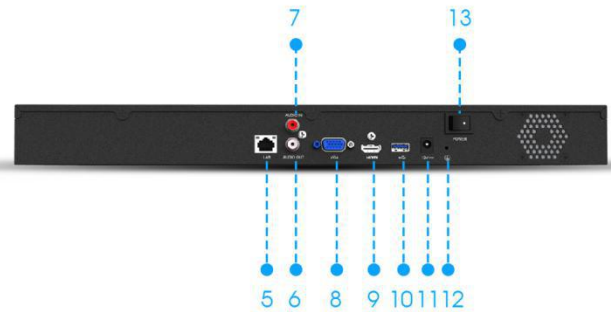

- 1. Run Indicator    2. HDD Indicator    3. Power Indicator    4. USB    5. LAN    6. Audio Out    7. Audio In    8. VGA
- 9. HDMI    10. USB    11. Power    12. GND    13. Power Button

## Structure Diagrams

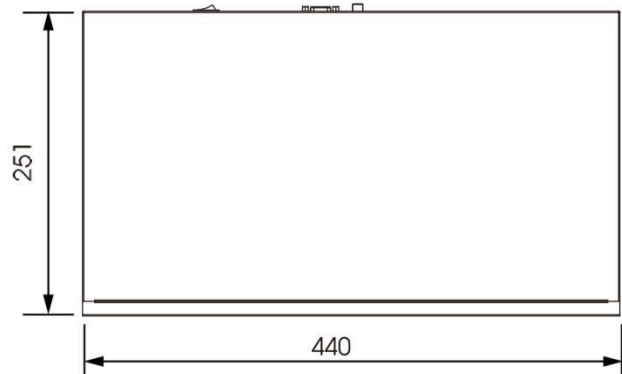

Units: mm

## Naming Convention



Mileight Technology Co.,Ltd. | [www.mileight.com](http://www.mileight.com)

Contact Us: [sales@mileight.com](mailto:sales@mileight.com)    [support@mileight.com](mailto:support@mileight.com)



Add: 7509 N.W. 36th Street, Miami,  
Florida 33166, USA  
Tel: +1-800-561-0485

Add: 9F/901, Star Valley B/D Digital-ro  
9gil 99, Geumcheon-gu, Seoul, Korea  
Tel: +82-2-839-3335

Add: No.23 Wanghai Road,  
2nd Software Park, Xiamen, China  
Tel: +86-592-5922772