

# 180° Panoramic H.265+ Mini Bullet Network Camera



IP67

IK10


DATASHEET

## KEY FEATURES

- ▶ **Smart Stream** (Bandwidth, storage and bit rate are saved with Smart Stream On, eg, H.265+ saves 70%~80% bandwidth that of H.264.)
- ▶ **120dB Super WDR** (Excellent performance even when the ratio of the luminosity of brightest and darkest is up to 120dB.)
- ▶ **Advanced Functions** (Boasting to support various advanced functions such as HLC, Defog, ROI.)
- ▶ **256G** (Supporting ultra-large external microSD/SDHC/SDXC card storage up to 256G.)
- ▶ **Adjustable 3-Axis Bracket** (Providing a robust mounting platform for angle adjustments on a 3-axis plane.)
- ▶ **Video Content Analysis** (With 10 detection modes, VCA greatly enhances the performance bringing comprehensive surveillance functions.)

## 4K Video Viewing Experience

Milesight 4K H.265 Network Camera delivers up to 4K resolution (3840\*2160, effectively four times that of Full HD) at 15 frames per second (fps), providing users with ultra-high-definition video viewing experience.

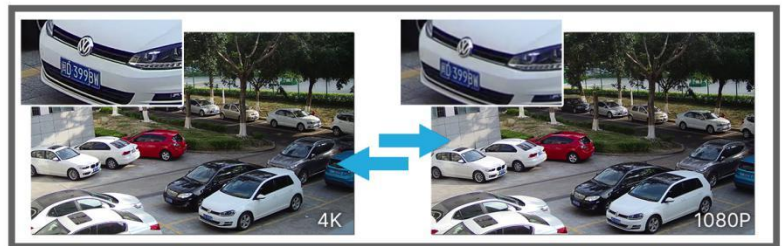

## 180° Panoramic View

The camera is perfect for whole picture viewing experience. It catches 180° horizontal coverage and 95° vertical coverage, achieving 180° panoramic viewing with only single sensor, which is a revolutionary creation in the bullet model.

## Advanced Built-in Microphone

With the built-in microphone which adopts the advanced codec, the camera is able to provide clearer voice. It applies PTFE Membrane to safeguard the built-in microphone, ensuring IP67-rated weather proof capability for reliable performance.



## Integrated Junction Box

The well-designed Integrated Junction Box ensures efficient and simple installation. It enlarges the space to make cable connection neat and easy. With the help of IP67-rated weather-proof design and Point-contact Power Supply, the Integrated Junction Box is able to offer stable operation and supreme user-experience.

# 180° Panoramic H.265<sup>+</sup> Mini Bullet Network Camera



|                  | Model                 | MS-C5365-PB<br>(5MP)   | MS-C8165-PB<br>(4K)  |
|------------------|-----------------------|--|--|
| <b>Camera</b>    | Image Sensor          | 1/2.8" Progressive Scan CMOS   |  |
|                  | Min. Illumination     | Color: 0.005Lux@F1.2<br>Color: 0.008Lux@F2.0<br>B/W: 0Lux with IR on   | Color: 0.01Lux@F1.2<br>Color: 0.012Lux@F2.0<br>B/W: 0Lux with IR on                                      |
|                  | WDR                   | 120dB Super WDR  |  |
|                  | Lens                  | 1.68mm@F2.0  |  |
|                  | Mount                 | M12  |  |
|                  | Field of View         | H180°/V95°   | H180°/V86°   |
|                  | Shutter Time          | 1/100000s~1s   |  |
|                  | IR Distance           | Up to 15m  |  |
|                  | Day/Night Mode        | Day/Night/Auto/Customize/Schedule  |  |
|                  | S/N                   | >55dB  |  |
| <b>Video</b>     | Max. Image Resolution | 2592x1944 (Original)   | 3840x2160  |
|                  | Primary Stream        | 30fps@(2592x1944)(Original),<br>30fps@(2560x1440, 1920x1080, 1280x720)   | 15fps@(3840x2160, 3440x1936),<br>25fps@(3200x1800), 30fps@(2880x1620,<br>2560x1440, 1920x1080, 1280x720) |
|                  | Secondary Stream      | 30fps(640x480, 640x360, 320x240)   | 30fps@(704x576, 640x480, 640x360, 320x240)   |
|                  | Tertiary Stream       | 30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240, 320x192, 320x180)  |  |
|                  | Video Compression     | H.265 <sup>+</sup> /H.265(HEVC)/H.264 <sup>+</sup> /H.264/MJPEG  |  |
|                  | Video Bit Rate        | 16Kbps~16Mbps(CBR/VBR Adjustable)  |  |
|                  | Privacy Masking       | Up to 24 areas   |  |
|                  | ROI                   | Up to 8 areas  |  |
|                  | Image Setting         | Brightness/Contrast/Saturation/Sharpness   |  |
| <b>Interface</b> | Ethernet              | 1*RJ45 10M/100M Ethernet Port  |  |
|                  | Audio Interface       | Built-in Microphone  |  |
| <b>Network</b>   | Network Storage       | NAS(Support NFS, SMB/CIFS), ANR  |  |
|                  | Protocol              | IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL |  |
| <b>Audio</b>     | Audio Compression     | G.711/AAC/G.722/G.726  |  |
|                  | Audio Sampling Rate   | 8/16/32/48KHz  |  |
|                  | Audio Bit Rate        | 16~256kbps   |  |
|                  | Two-way Audio         | N/A  |  |

# 180° Panoramic H.265+ Mini Bullet Network Camera





|                |                      |   |
|----------------|----------------------|---|
| <b>System</b>  | Storage              | Support microSD/SDHC/SDXC Card Local Storage, up to 256G  |
|                | Advanced Function    | Heat Map, BLC, HLC, 2D DNR, 3D DNR, Defog, AWB, EIS, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur, Watermark  |
|                | SIP/VoIP Support     | Yes, Voice & Video-over-IP  |
|                | Event Trigger        | Motion Detection, Network Disconnection, Audio Alarm, etc.  |
|                | Event Action         | FTP Upload, SMTP Upload, SD Card Record, SIP Phone, HTTP Notification, etc.   |
|                | Video Analysis       | Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed |
|                | System Compatibility | ONVIF Profile G & Q & S & T, API  |
| <b>General</b> | Working Temperature  | -40°C~60°C  |
|                | Working Humidity     | 0~90%(Non-condensing)   |
|                | Power Supply         | PoE (802.3af) / DC 12V ± 10%  |
|                | Power Consumption    | 4.1W MAX<br>7.1W MAX (With IR on)   5.3W MAX<br>8.3W MAX (With IR on)   |
|                | Weather Proof        | Up to IP67-rated for Weather-resistant Performance  |
|                | Housing              | Vandal-proof IK10-rated Metal Housing   |
|                | Weight               | 630g  |
|                | Dimensions           | 95.8mmX74mmX158.5mm   |
|                | Warranty             | 3/5 Years   |



# 180° Panoramic H.265+ Mini Bullet Network Camera



## Structure Diagrams

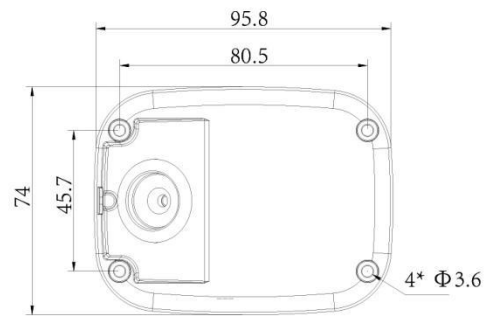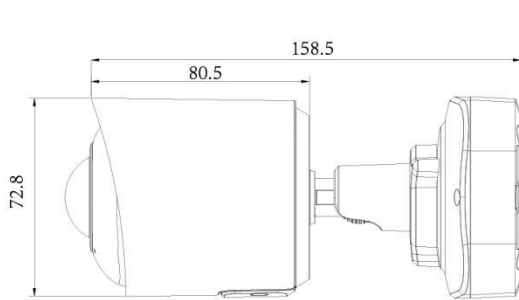

Units: mm

## Accessories Support

A01 Pole Mount

Weight: 720g  
Dimensions: 170\*51.5\*152.6mm



A03 External Corner Bracket

Weight: 900g  
Dimensions: 170\*152.5\*76.3mm



Milesight Technology Co., Ltd. | [www.milesight.com](http://www.milesight.com)

Contact Us: [sales@milesight.com](mailto:sales@milesight.com) [support@milesight.com](mailto:support@milesight.com)

Add: 220 NE 51st Street, Oakland  
Park, Florida 33334, USA  
Tel: +1-800-561-0485

Add: 925, Anyang SK V1 Center, LS-ro  
116beon-gil, Dongan-gu, Anyang-si, Korea  
Tel: +82-31-990-7732

Add: No.23 Wanghai Road,  
2nd Software Park, Xiamen, China  
Tel: +86-592-5922772

